


PrimeMotion C MINI



Microwave motion detector for opening automatically controlled doors

Original instructions

General




PrimeMotion C MINI



- ① Hood
- ② Light window detector indication
- ③ Cable bushing
- ④ Mounting
- ⑤ Microwave module
- ⑥ LED microwave: green
- ⑦ Potentiometer

1 Safety instructions

Observe the national and international regulations on door safety.
Only trained, qualified personnel may mount and start up the detector.
The unit may only be opened and repaired by the manufacturer.
The unit may only be operated from a safety extra-low voltage (SELV) system with safe electrical separation.
Always consider the safety functions of your application as a whole, never just in relation to one individual section of the system.
The installer is responsible for carrying out a risk assessment and installing the detector and the door system correctly.
Avoid touching any electronic components.
The door drive and transom profile must be earthed correctly.



Start-up

Recommended start-up sequence: **I. Mounting** **II. Connection**

2 Montage

1. Remove cover hood
2. Lay and connect cable
3. Mount detector

I Mounting



Mounting of the detector

1. Position drill template
2. Drill the holes, remove drill template
3. Lay cable and mount detector



3 Electrical connections


II Connecting

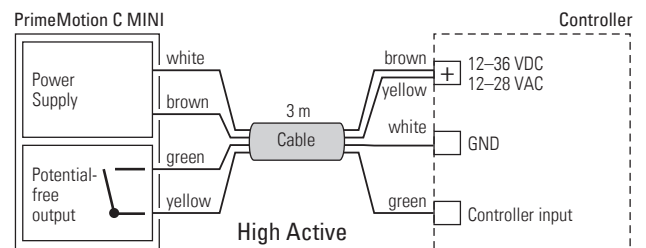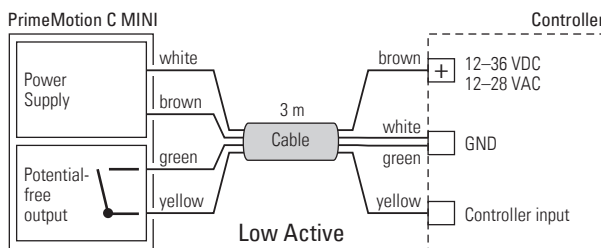


4 Mechanical fine tuning

Manual settings of the inclination


0° ... +45° in 5° steps




Wide radar field



Inclination angle: 35°

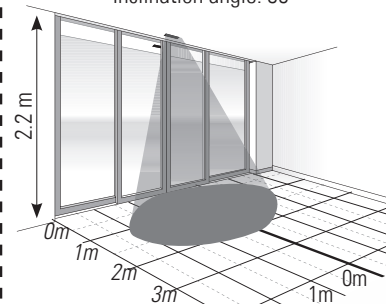


turn 90°




90°

Narrow radar field




Inclination angle: 35°

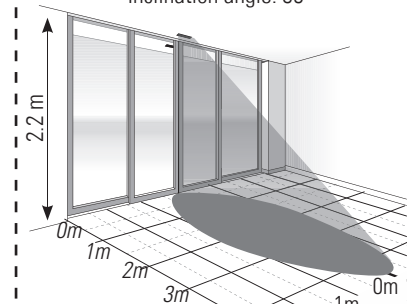

5 Configuration by hand of radar field with potentiometer

Potentiometer

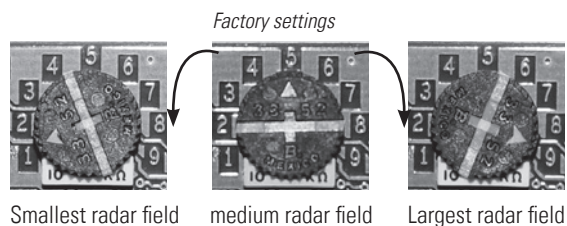

Radar function		Description	
Field size			1 = Smallest radar field 2 ... 8 = Medium radar field 9 = Largest radar field size

6 Remediating malfunctions

green LED	Fault	Remedy
continuously lit	Radar tripping when door is closing	1. Set angle of radar further away from the door. 2. Adjust radar field size.
	Radar false tripping without apparent external influence	1. Avoid light sources (e.g. fluorescent tubes) in the immediate vicinity of the detector. 2. No moving objects (plants, advertising posters, etc.) in the vicinity of the detector. 3. Avoid strong vibration at the radar detector. 4. Possible influence from a second radar detector in the vicinity (very unlikely).

7 Technical data

Technology	Radar 24.125 GHz
Mounting height	1.8 – 4 m
Operating voltage	12–36 VDC / 12–28 VAC
Operating current	max. 32 mA at 24 VDC
Power consumption	max. 1.3 W
Output radar	max. switching voltage: 48 VAC / VDC max. switching current: 120 mA max. switching capacity: 550 mW
Protection type	Suitable for use acc. to IP54
Operating temperature	–20° to 60° C
Dimensions	120 x 64 x 44 mm (L x W x D)
Weight	95 g
Cable length	3 m

8 EU Declaration of Conformity



Bircher Reglomat AG hereby declares that the device types specified in these operating instructions comply with the directives 2014/53/EU, 2011/65/EU.

The full text of the EU Declaration of Conformity is available at the following address:
www.smartaccess.bircher.com/downloads-bbc-bircher-smart-access

9 WEEE



Devices with this symbol must be treated separately during disposal. This must be done in accordance with the laws of the respective countries for environmentally sound disposal, processing and recycling of electrical and electronic equipment.

10 FCC approval



This device meets the requirements of Part 15 of the FCC regulations and the RSS-210 standard of Industry Canada.

Warning: Changes or modifications made to this device may void the FCC authorisation to operate this device.

11 Contact

BBC Bircher Smart Access

Bircher Reglomat AG
 Wiesengasse 20
 CH-8222 Beringen
www.bircher.com

Made in China / Designed in Switzerland