

SpotScan

Active infrared presence detector
for automatic doors

Strong, flexible and discreet

- **Background analysis mode mounting height 3.2 m (10.5 ft)**
(Analyse background)
- **Background suppression mode mounting height 4.5 m (14.8 ft)**
(Ignore background)
- **Discreet appearance and able to be installed almost anywhere**
thanks to its compact design
- **Easily and individually adjustable with DIP switches**
and scanning range setting
- **Multiple usage for mobile or stationary operating mode**
- **With an extensive range of accessories for every situation**



SpotScan


Active infrared presence detector for automatic doors

Safe on the spot

SpotScan has been proven as a really versatile all-rounder. In stationary operating mode it provides protection against entrapment at shearing edges of automatic revolving and swing doors. In the door ride-on type of application (mobile operating mode), it is installed as a collision prevention device. With sliding and curved sliding doors SpotScan monitors the main and secondary closing edges. Additionally it features a test input.




For a wide range of applications

Thanks to its compact design and the extensive accessory range the SpotScan can be adapted to suit any type of installation. It is suitable for counting people in confined spaces and picks-up the presence of objects or people on escalators and in elevators. Amongst other areas it can also be installed in making occupancy checks of people in security locks.

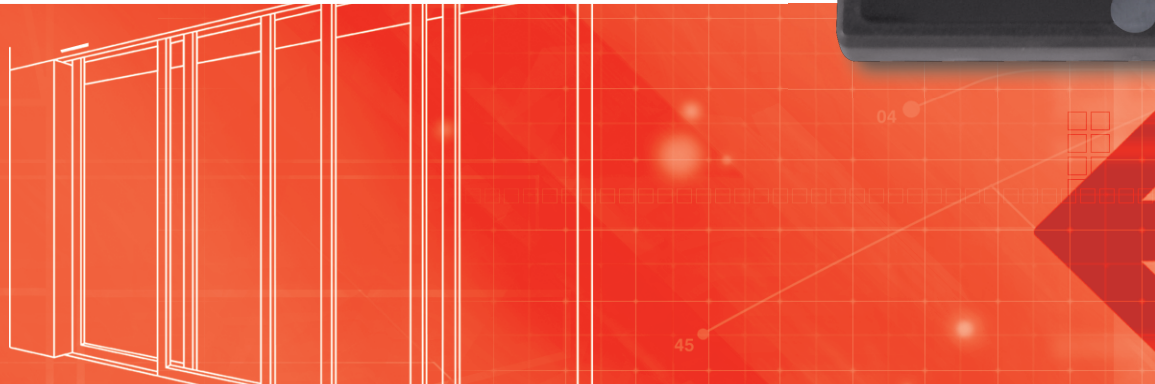

Easily installed and set-up

Concentrating on the importance of its design, SpotScan is really easy to understand and install. A screwdriver is all that's needed to adjust the optical scanning range of the sensor.




Wall mounting, recessed into the ceiling or integrated – the SpotScan offers solutions for all types of installation.

Your benefits

Multi-purpose adjustment with only three switches

- As versatile the SpotScan is, as easy it is to be set up: only three switches are necessary to adjust this sensor for the needs of the application. The type of operation, signal output and transmitting frequency are configured just using the three DIP switches at the front of the sensor. Depending on the installation height, the switching-point of the infrared light scanner can be adjusted for height up or down using the mechanical adjusting screw.

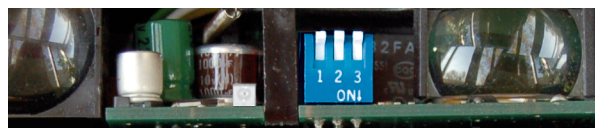

Changing frequencies (DIP switch 1)

Frequency selection 1 or 2 prevents two adjacent sensors from interfering with each other.


Operating mode (DIP switch 2)

The sensor can be optionally utilized for mobile or stationary operating mode using the background suppression or background analysis technology.

Output switching mode (DIP switch 3)

The output signal is switched active or passive depending on the type of control and application.

Further accessories

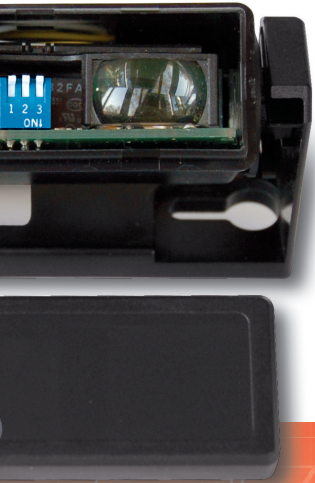

Protective cover for external mounting



Flush-type cover for recessed installations



Mounting frame for recessed installations



Secure in every application

Situation


Main closing edge of curved sliding doors

Solution

- The SpotScan provides a single beam protection all along the main closing edge. Installation heights up to 3.2 m (10.5')!
- In suppression mode can be mounted until a height of 4.5 m (14.8')

Benefits

- Protects people from getting trapped between two door leaves
- The safety beams are spread along the curve of the door



Situation


Main closing edge of revolving doors

Solution

- The built-in SpotScan detects persons and objects along the main closing edge

Benefits

- The movement of the door can be slowed down and stopped in time
- The rapid touch-free detection system ensures people don't get trapped between the door leaf and the door post (main and opposite closing edge)



Situation


Secondary closing edge of sliding doors

Solution

- People are immediately detected in the danger areas that arise when sliding doors are opening. The SpotScan protects people before the door leaves reach their opening position

Benefits

- The touch-free protection device operates invisibly
- Precise and reliable protection system



Situation


Secondary closing edge of swing doors

Solution





- The touch-free protection prevents fingers getting trapped when the door closes along the entire secondary closing edge

Benefits

- There is no need for any other protection arrangements such as mechanical coverings



Order details

Item no.	Description	
212174	SpotScan Relay output Factory settings: Stationary, passive switching	
212795	Ceiling mounting frame black	
212808	Protective cover anthracite	
213451	Flush-type cover	

Additional products

Activation of automatic doors

Reflex 2 Microwave Motion Detector with electronically adjustable range

PIR 20 Passive Infrared Motion Detector with minimal dimensions particularly suitable for being built-in

PIR 30 Passive Infrared Motion Detector for extended detection fields and installation heights up to 5.0 m (16.4')

Safeguarding of swing doors

TopScan prevents interference with automatic Revolving and swing doors



Specifications

Mechanical specifications

Housing material	ABS (black)
Optic window material	Lexan
Weight	130 g (4.6 oz.)
Dimensions	
Sensor only	102x45x32 mm (4.02x1.77x1.26")
With swivel bracket	123x45x50 mm (4.84x1.77x1.97")
With mounting bracket	140x45x34 mm (5.51x1.77x1.34")
Type of connection	5 m (16.4') cable with plug

Technical specifications

Technology	IREN (Active infrared)
Type of light	Pulsed light
Beams	1
Mounting height	– Max. 3200 mm (10.5') for background analysis mode – Max. 4500 mm (14.8') for background suppression mode
Scanning range adjustment	1000–3200 mm (3.3–10.5')
Detection range	100–3200 mm (4"–10.5') (stationary) 500–4500 mm (19.7"–14.8') (mobile)
Field size at 2.0 m (6.6')	Approx. 50 x 50 mm (2 x 2")
Operating mode	Mobile or stationary
Response time	Approx. 35 ms

Electrical specifications

Supply voltage	10–48 V DC / 11–36 V AC, 50/60 Hz
Power consumption	Max. 100 mA
Power absorbed	Max. 3 W / 3 VA
Test	5–48 V DC
Signal output	Relay, 1 contact normally open max. switching voltage 48 V AC/DC max. switching current 0.5 A AC / 1 A DC
Output switching mode	Active or passive
Function display	LED red

Environmental conditions

Protection class	Suitable for application in accordance with IP52, with protective cover IP65
Operating temperature	–20°C to +60°C (–4°F to +140°F)
Humidity	Max. 90% relative, non-condensing

Standards

EMV Immission	EN 61000-6-1 EN 61000-6-2
EMV Emission	EN 61000-6-3 EN 61000-6-4

BBC Bircher Smart Access

870 Pratt Avenue N
Schaumburg, IL 60193
USA
Phone 800 252 1272
info@bircher.com
www.bircher.com

Note

Technical details and recommendations on our products are based upon experience and represent guidelines for the user. Details in brochures and specification sheets do not guarantee any special product features, apart from those which we confirm in individual cases. We reserve the right to make changes as the result of technical developments.